

compact

TKM 300 COMPACT



SPARE PART
SUPPORT



%70 POWER
ECONOMY





24 MONTHS
GUARANTEE



RENEWABLE
MACHINE



HIGH
SAFETY

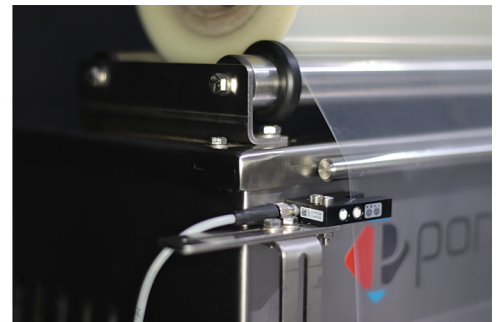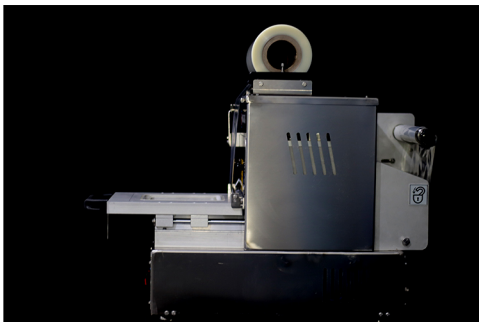

TKM 300 COMPACT

THIS MODEL IS THE SMALLEST MODEL OF TKM SERIES. AS THE MOLD IS REPLACEABLE, IT PROVIDES UNLIMITED CHOICE OF MOLD. AUTOMATIC FILM SYSTEM, AUTOMATIC MOLD SYSTEM WITH PNEUMATIC AND BEING EASY TO CARRY WITH COMPACT STRUCTURE MAKES IT PREFERABLE. IT HAS THE CAPACITY OF MAKING 15-20 OPERATIONS PER MINUTE. IT CAN BE USED IN ALL AREAS THAT DO NOT NEED VACUUM.



compact

TKM 300 COMPACT

Technical Specifications

INSTALLED POWER	220V 50 HZ, 6 A
ENERGY CONSUMPTION	600 WATTS
AIR PRESSURE	6 BAR
AIR CONSUMPTION	0,9 LT CYCLE
CAPACITY/MIN	15-20 PROCESS
MACHINE DIMENSIONS	462X764X690 MM
PACKAGED DIMENSIONS	300X400X575MM
MAX. MOLD DIMENSIONS	260X275MM
WEIGHT NET/PACKAGED	40KG/65KG
MAX. DEPTH OF PLATE	120 MM
MAX. FILM WIDTH	270 MM
MIN. FILM THICKNESS	30 MIC
MAX. FILM WEIGHT	10 KG

MAXIMUM PLATE SIZE

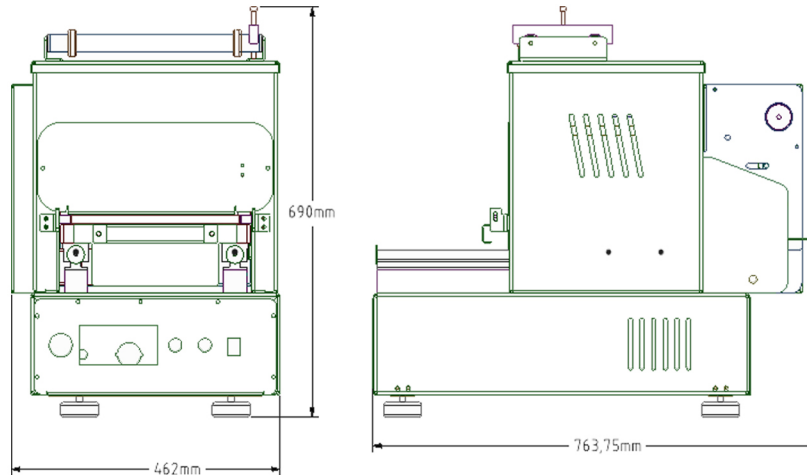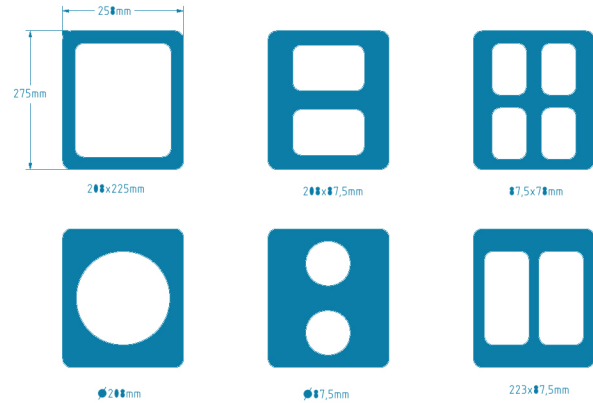

TKM 300 COMPACT Advantages

With its compact structure, the ideal model to use on desk or workbench	15 - 20 operation per minute and very easy to use	Bottom and upper mold can be replaced	Film system operates automatically
Printed film can be used by placing photocell (optional)	English - Turkish language options	Complete stainless steel body of quality 304	All aluminum parts are eloxal coated
Mold system is completely coated with teflon	Completely cuts the film around the plate and does not need extra labor	Easy to install film and easy to clean	With auto-running mold operating with pneumatic system, it does not require arm strength
Energy saving with automatic digital temperature control system (PID)	Easy to service with the modular electrical system	2 year warranty	CE certificate